

INSTRUCTION SHEET

Buell
AMERICAN MOTORCYCLES

-J02088

Kit Number 43814-01Y

REV. 7-20-00

PEGASUS HEAD BOLT COVER KIT

General

This kit is designed to install on 1995 and later Buell models except P3 - Blast models.

Kit contents:

ITEM	DESCRIPTION
1	Head bolt cover, Pegasus, front (2)
2	Head bolt cover, Pegasus, rear (2)
3	Set screw, 1/4-20, cup pnt, hd (4)
4	Allen wrench, 1/8"

Setscrew sets, Part Number 3231B, are also available separately.

Installation

CAUTION

To avoid burns to hands and fingers, do not install Head Bolt Covers until after engine has cooled.

NOTE

A Service Manual is available for your vehicle is available from your local Buell Dealer.

1. Remove spark plugs according to applicable Service Manual procedure.
2. See Figure 1. Install head bolt covers (1), on head bolts (3). Tighten using setscrew (2) and allen wrench included with kit. To prevent setscrews from falling into the spark plug holes, start threading the setscrews into the covers before placing them over the head bolts. Position cover on head bolt so that when spark plug is reinstalled setscrew is hidden from view but accessible to an allen wrench. Do not tighten setscrews on high points of bolts.

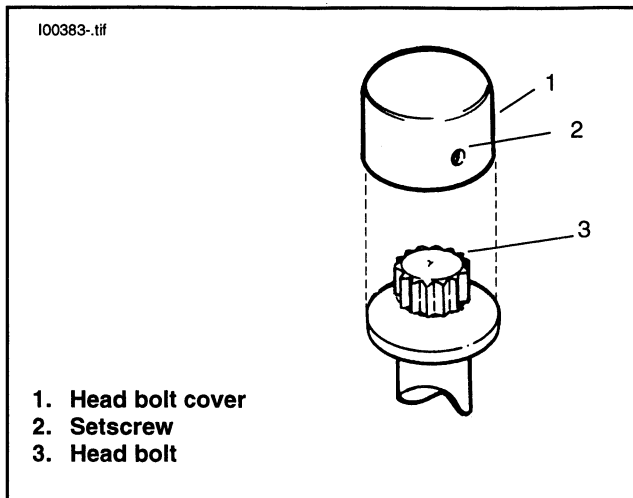


Figure 1. Head Bolt Cover Installation

3. The Pegasus logo points to the spark plug. To assure proper cover position and alignment, the right head bolt cover setscrews should be at the ten o'clock position and the left head bolt cover setscrews should be at the two o'clock position.
4. Reinstall spark plugs.
5. Readjust setscrew tightness after motor has operated at full operating temperature and then cooled.